


# The ultimate platform for General Surgery and Pain Management

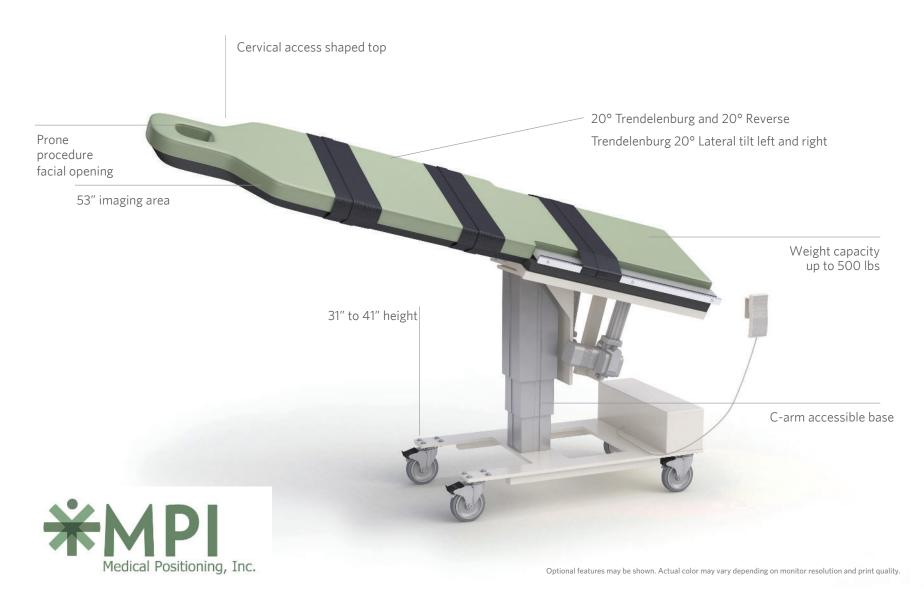

## **GSPM** Table TM

#### STANDARD FEATURES

| Height Adjustability: | Maximum Patient Capacity: | Imaging Area: | Trendelenburg/Reverse Trendelenburg: | Lateral Tilt:      |
|-----------------------|---------------------------|---------------|--------------------------------------|--------------------|
| 31" to 41"            | 500 lbs                   | 53"           | 20°/20°                              | 20° Left and Right |

| Control System: | Braking:                      | Additional Features:                                      |  |                       |
|-----------------|-------------------------------|---|--|-----------------------|
| Hand Controller | Individual<br>Locking Casters | Cervical Access Shaped Top Prone Procedure Facial Opening | Carbon Fiber Top and 2" Pad<br>Patient Safety Straps | C-arm Accessible Base |

| PRODUCT SPECIFICATIONS                           |                          |         |  |  |  |  |
|--|--------------------------|---------|--|--|--|--|
| Length:  | Width:                   | Weight: |  |  |  |  |
| 84"  | 22"                      | 556 lbs |  |  |  |  |
| Foam:  | Electrical:              |         |  |  |  |  |
| California Technical<br>Bulletin 117 - Section E | 120 VAC, 60 Hz, 1.6A Max |         |  |  |  |  |

#### PRODUCT BENEFITS

Low attenuation reduces scatter for better imaging
Cantilever design for better C-Arm accessibility during
pain management procedures
Bariatric capable

## CERTIFICATIONS

Industry Standards: Warranty: Standard Color:

UL 60601-1, CAN/CSA C22.2 No. 601.1 5 Years

### **OPTIONAL FEATURES**

Foot Controller Carbon Fiber Arm Boards